

Serie | 4, built-under cooker hood, 90 cm, Stainless steel
DHU965CGB



The built-under cooker hood: save space by mounting the hood beneath your upper cabinet or on the wall.

- With exhaust, the air is cleaned by a grease filter and then ducted to the outside which ensures optimal kitchen air quality.
- 3-Speed Power Level Options To Suit Your Cooking Style And Recipes

Technical Data

Typology :	Traditional
Approval certificates :	CE, G-Mark
Length electrical supply cord (cm) :	130
Net weight (kg) :	10.624
Type of control :	mechanical
Number of speed settings :	3
Maximum output recirculating air (m3/h) :	260
Number of lights :	2
Noise level (dB) :	68
Diameter of air outlet (mm) :	120
Grease filter material :	Washable aluminium
Odour filter :	Yes
Operating Mode :	Convertible
Optional accessories :	DHZ2700
Type of lamps used :	Halogen
Total power of the lamps (W) :	56
Grease filter type :	Kassette
Connection Rating (W) :	306
Current (A) :	13
Voltage (V) :	230-240
Frequency (Hz) :	50
Plug type :	GB plug
Installation typology :	Built-under
Material body :	Stainless steel
Approval certificates :	CE, G-Mark
Plug type :	GB plug
Dimensions of the product, with chimney (if exists) (in) :	/ x x
Dimensions of the packed product (in) :	21.65 x 8.26 x 36.61
Net weight (lbs) :	23.000
Gross weight (lbs) :	26.000
Motor location :	Integrated motor in hood body
No-return airflow flap :	No
Length electrical supply cord (cm) :	130
Dimensions of the product, with chimney (if exists) (mm) :	x 900.0 x 482.0
Dimensions of the packed product (HxWxD) (mm) :	550 x 210 x 930
Net weight (kg) :	10.624
Gross weight (kg) :	11.7



**Serie | 4, built-under cooker hood, 90 cm,
Stainless steel
DHU965CGB**

**The built-under cooker hood: save space
by mounting the hood beneath your upper
cabinet or on the wall.**

Variant:

Design:

- 900 mm width

Comfort:

- Suitable for ducted or re-circulated extraction
- Push button controls for 3 speeds
- Twin motor
- Adjustable glass visor
- 2 x halogen - energy saving lamps
- Metal grease filter, dishwasher safe

Technical information:

- Ducted extraction rate according to DIN/EN 61591: max. 350 m³/h
- Noise level according to EN 60704-3 und EN 60704-2-13 at max. normal use exhaust air: 68 dB(A) re 1 pW (56 dB(A) re 20 µPa sound pressure)
- Power rating: 306 W

Measures:


- 120 mm diameter pipe
- Light Intensity: 110 lux
- Colour Temperature: 2700 K

Environment and Safety:

- Energy Efficiency Class: F*

** In accordance with the EU-Regulation No 65/2014*

**Serie | 4, built-under cooker hood, 90 cm,
Stainless steel
DHU965CGB**

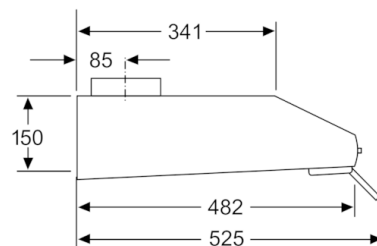

measurements in mm