

**Series 4, heat pump tumble dryer, 9 kg
WQG24200GC**



- **AntiVibration Design:** extremely stable and especially quiet thanks to special vibration protection.
- Anti-Vibration Side Panels reduce vibrations and ensure greater stability during the washing and spinning process.

Technical Data

Built-in / Free-standing : Free-standing
Removable top : No
Door hinge : Right
Color / Material body : White
Length electrical supply cord : 145.0 cm
Height with worktop : 0 mm
Dimensions of the product : 842 x 598 x 613 mm
Net weight : 49.5 kg
Drum volume : 112 l
Fluorinated greenhouse gases : No
Type of refrigerant : R290
Hermetically sealed equipment : Yes
The quantity expressed in CO2 equivalent : 0.000 t
Connection Rating : 625 W
Fuse protection : 10 A
Voltage : 220-240 V
Frequency : 50 Hz
Drying process : automatic
Capacity cotton - NEW (2010/30/EC) : 9.0 kg
Energy efficiency rating : A++
Energy consumption electric dryer, full load - NEW (2010/30/EC) : 2.11 kWh
Standard cotton programme time at full load : 238 min
Energy consumption electric dryer, partial load - NEW (2010/30/EC) : 1.22 kWh
Standard cotton programme time at partial load : 143 min
Weighted annual energy consumption, electric dryer - NEW (2010/30/EC) : 259.0 kWh/annum
Power consumption in off-mode - NEW (2010/30/EC) : 0.15 W
Power consumption in left-on mode - NEW (2010/30/EC) : 0.50 W
Weighted programme time : 184 min
Condensation efficiency class - NEW (2010/30/EC) : B
Average condensation efficiency full load (%) : 85 %
Average condensation efficiency partial load (%) : 85 %
Weighted condensation efficiency (%) : 85 %



Series 4, heat pump tumble dryer, 9 kg WQG24200GC

- WQG24200GC
- tumble dryer with heat pump
- Stainless steel front

Main features

Programmes

- Special programmes: woollen finish, mix, towels, Time program warm, Time program cold, sportswear, Down wear, Super 40, shirts/blouses

Options

- Anti crease cycle 60 min at the end of the programme
- Touch control buttons: Low Heat, Signal, less ironing, 24 h Ready in


Convenience and Safety

- Protection filter for condensor
- DUO-Tronic
- Fully electronic control dial for sensor drying programmes, timed and special programmes
- LED-Display for remaining time and 24 h end time delay, programme status indication, special functions
- Active flow drying system: Big Stainless steel with textile care structure, soft design paddles
- AntiVibration Design: More stable and silent
- Wool Drying Basket
- Drain set for condensate
- Drum interior light
- Childproof door lock
- Buzzer to indicate the end of cycle
- pull-open latch
- Door hinge: right-hand
- Metal door closing hook

Technical information

- Can be built-under
- Dimensions (H x W x D): 84.2 x 59.8 x 61.3 cm
- Dimensions (H x W): 84.2 cm x 59.8 cm
- Appliance depth: 61.3 cm
- Appliance depth incl. door: 64.8 cm
- Appliance depth with open door: 109.6 cm

Series 4, heat pump tumble dryer, 9 kg
WQG24200GC

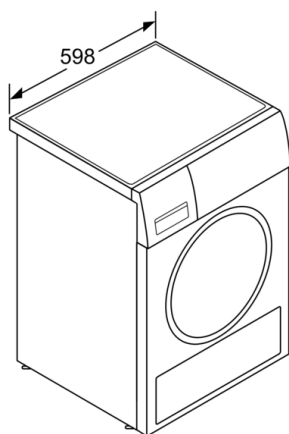

measurements in mm

Measurements in mm

